

# Patchcord Duplex FC/PC-LC/PC | FiberHK

---

 [fiberhk.com/product\\_fhk/patchcord-duplex-fc-pc-lc-pc](https://fiberhk.com/product_fhk/patchcord-duplex-fc-pc-lc-pc)



## Patchcord Duplex FC/PC-LC/PC

Sales No. PC-DX-FCP-LCP

Manufacturer: FiberHK

Product Category: Patchcord | Duplex

## Precision Engineered Fiber Optic Solutions

---

FHK operates a state-of-the-art cable assembly facility specializing in the manufacture of high-performance patch cords and pigtails. Utilizing premium-grade connectors and optical cables, each assembly undergoes

### Rigorous Testing

IEC-compliant optical performance validation

### Traceable Quality

Unique ID with certified test reports

### Standardized Production

ISO-certified manufacturing processes

## Features

---

- Configuration Options: Simplex & duplex patch cords
- Cable Specifications: PVC/LSZH jackets with Ø0.9/2.0/3.0mm diameters
- Fiber Types:
  - Single-mode: OS2 (G.652D/G.657):
  - Multimode: OM1/OM2/OM3/OM4/OM5
- Compliance: RoHS, REACH
- Certification: IEC 61300 / IEC 61753 / TIA-568.3-D
- Connectors: SC/LC/FC/ST/MU/MPO (UPC/APC polish)
- Performance: ≤0.3dB IL, -40°C to +85°C operating range

## Applications

---

- Telecom Infrastructure: 5G fronthaul, FTTH, OLT connections
- Cloud Data Centers: Spine-leaf architecture, 400G Ethernet

- Broadcast & Media: 4K/8K video production, OB vans
- Industrial Automation: PLC networks, robotic cells
- Enterprise Networks: Campus backbones, PoE++ systems
- Test Laboratories: Optical component validation
- Defense Systems: Secure comms, drone command links
- Medical Imaging: Endoscopy, laser surgery systems
- Smart Transportation: Traffic management, V2X comms

## General Mechanical Specifications for Fiber Optic Patch Cords

Parameter	Single Mode (SM)	Multimode (MM)	Test Standard
Insertion Loss	≤0.3 dB	≤0.3 dB	IEC 61300-3-4
Return Loss	≥50 dB (PC/UPC)	≥35 dB (OM3/OM4)	IEC 61300-3-6
	≥60 dB (APC)	≥30 dB (OM1)	
Repeatability	≤0.1 dB	≤0.1 dB	IEC 61300-3-28
Durability	≤0.2 dB change (500 matings)	≤0.2 dB change (500 matings)	IEC 61300-3-28
Interchangeability	≤0.2 dB	≤0.2 dB	IEC 61300-3-32
Tensile Strength	>100 N (SC/FC/ST)	>100 N (SC/FC/ST)	IEC 61300-3-12
	>80 N (LC/MU)	>80 N (LC/MU)	
Operating Temperature	-40°C ~ +85°C	-40°C ~ +85°C	IEC 61753-1
Bend Radius	≥30 mm (static)	≥30 mm (static)	IEC 61753-1
	≥15 mm (dynamic)	≥15 mm (dynamic)	


Parameter	Single Mode (SM)	Multimode (MM)	Key Requirement
Insertion Loss	≤0.5 dB	≤0.5 dB	Average of 12/24 fibers
Core-to-Core Variation	≤0.3 dB	≤0.3 dB	Loss deviation within connector
Alignment Accuracy	≤1.0 μm	≤1.5 μm	Guide pin precision (IEC 61754-7)

Parameter	Single Mode (SM)	Multimode (MM)	Key Requirement
Mating Force	≤40 N	≤40 N	With push-pull housing
End Face Geometry	Radius: 10-25 mm Apex Offset: ≤50 μm	Same as left	3D interferometry (IEC 61300-3-35)

Parameter	Single Mode (SM)	Multimode (MM)	Key Requirement
Insertion Loss	≤0.5 dB	≤0.5 dB	Average of 12/24 fibers
Core-to-Core Variation	≤0.3 dB	≤0.3 dB	Loss deviation within connector
Alignment Accuracy	≤1.0 μm	≤1.5 μm	Guide pin precision (IEC 61754-7)
Mating Force	≤40 N	≤40 N	With push-pull housing
End Face Geometry	Radius: 10-25 mm Apex Offset: ≤50 μm	Same as left	3D interferometry (IEC 61300-3-35)



FC Series

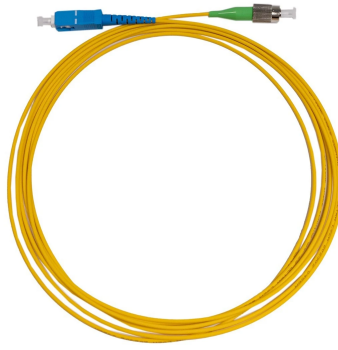

SC Series



SC Series



SC Series